
# **amtico** entryway



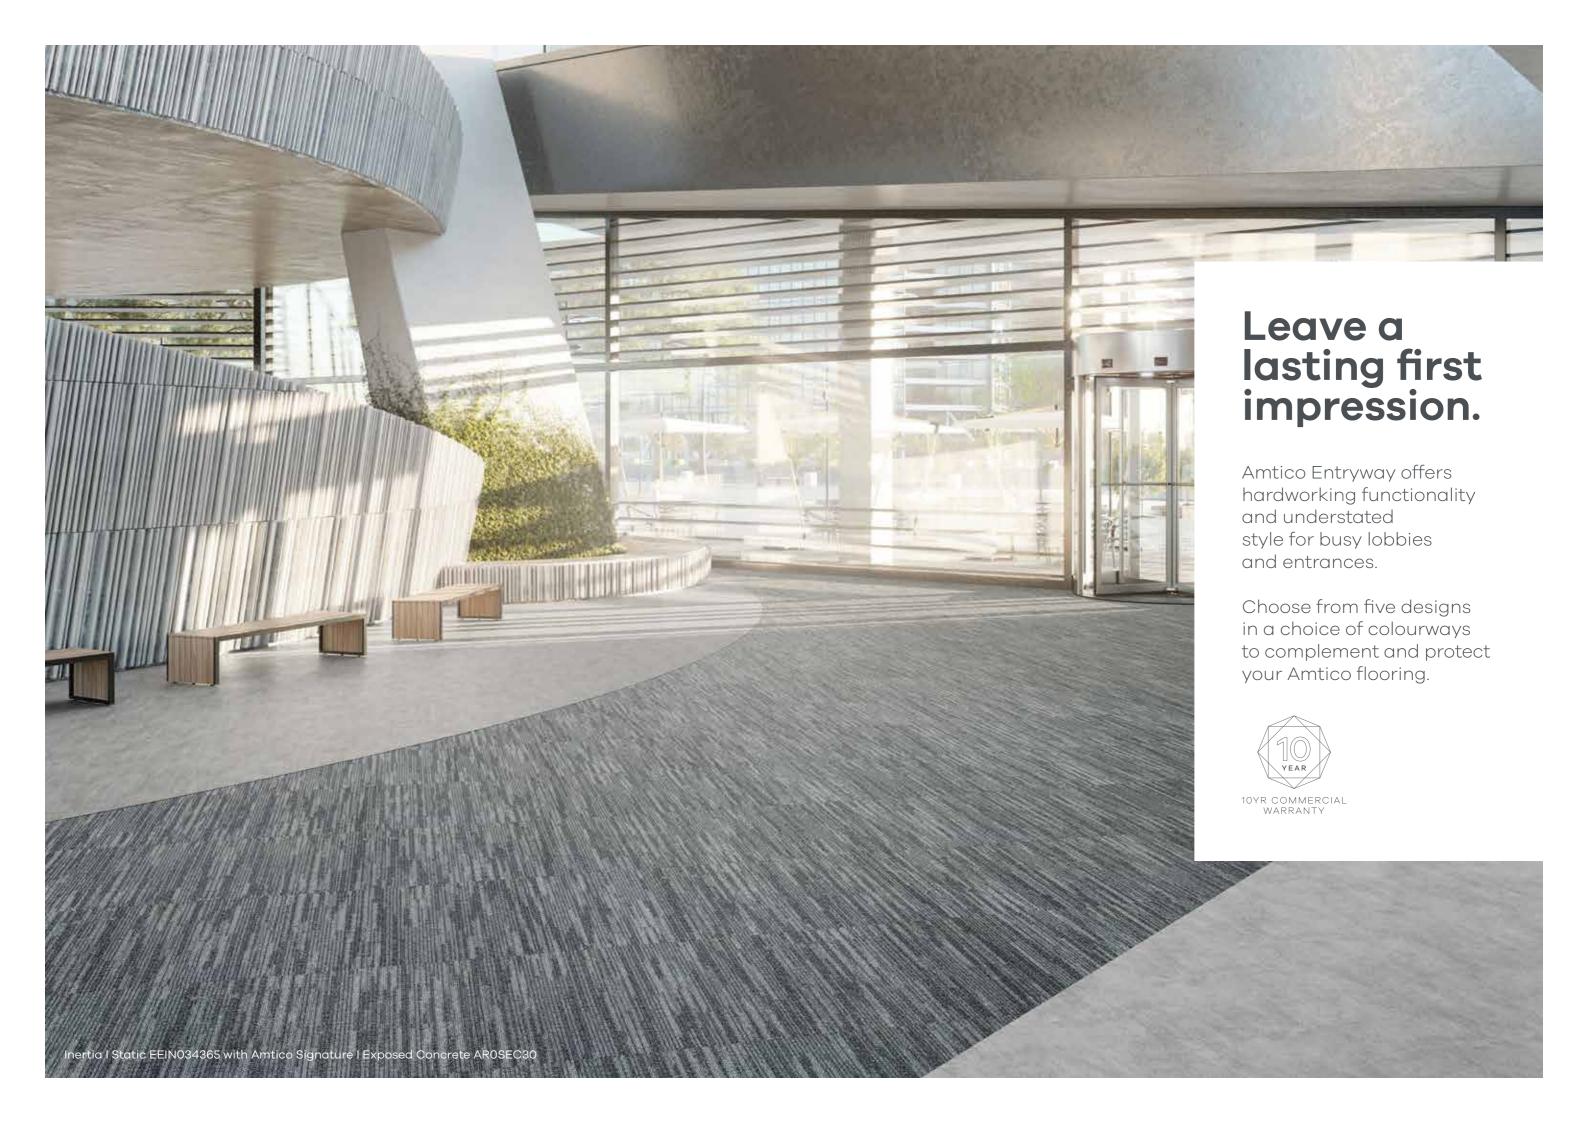


# Your floor's first line of defence.

# Amtico Entryway is tough, resilient and protective.

Scraper fibres remove soil and debris, while reinforced nylon fibres remove moisture. The combination of these two types of fibres provides optimum soil and moisture removal.



Scraper fibres can hold 2.5 times more sandy debris than its normal weight: **3.25kg per square metre.** 



It can also capture 3 times more moisture than its normal weight: **3.2 - 3.6kg.** 





# Part of an integrated flooring solution.

Amtico Entryway is designed to work effectively with our LVT flooring.

We recommend installing at least 6-8 foot-falls of Entryway tiles or planks in each entrance area. This will allow the system to achieve an optimum level of performance and also improves safety by minimising slip hazards.

Proper cleaning in entryways and other entrance areas is also essential for the maintenance of the flooring throughout a building. Focus cleaning efforts on entryways to ensure the beauty and longevity of your entire flooring investment.

Entrance

1-3 Feet

3-6 Eoo

6-8 Fe

9-12 Feet












# The Collections

# Inertia Specification

Fibre	6,6 Nylon
Dye Method	Solution dyed
Pile thickness	5.2 mm
Total thickness	8.7 mm (+15%/-10%)
Backing	Woven Polyester/PVC
Warranty	10 Years Limited
Suitable for Stairs	Yes (with protective nosings)

# **Charge Specification**

Fibre	6,6 Nylon
Dye Method	Solution dyed
Pile thickness	5.4 mm
Total thickness	8.8 mm (+15%/-10%)
Backing	Woven Polyester/PVC
Warranty	10 Years Limited
Suitable for Stairs	Yes (with protective nosings)





























Force Specification

ribre	0,0 1191011
Dye Method	Solution dyed
Pile thickness	5.0 mm
Total thickness	9.0 mm (+15%/-10%)
Backing	Woven Polyester/PVC
Warranty	10 Years Limited
Suitable for Stairs	Yes (with protective nosings)

# **The Collections**

## **Ruffian Specification**

Fibre	6,6 Nylon
Dye Method	Solution dyed
Pile thickness	4.2 mm
Total thickness	8.2 mm (+15%/-10%)
Backing	Woven Polyester/PVC
Warranty	10 Years Limited
Suitable for Stairs	Yes (with protective nosings)

# **Recoarse Specification**

Fibre	6,6 Nylon
Dye Method	Solution dyed
Pile thickness	5.2 mm
Total thickness	8.7 mm (+15%/-10%)
Backing	Woven Polyester/PVC
Warranty	10 Years Limited
Suitable for Stairs	Yes (with protective nosings)










# Available in

Monolithic	Quarter Turned
1410110111110	quartor runnou

1	1	1
1	1	1
1	1	1




Available in













609.6 x 609.6 mm /





### Amtico UK & **European Sales**

Solar Park Southside Solihull, West Midlands B90 4SH

UK Sales +44 (0) 121 745 0800 samples@amtico.com

South European Sales +44 (0) 121 745 0862 sales.soe@amtico.com

# **Amtico Head Office**

Kingfield Road Coventry CV6 5AA +44 (0) 24 7686 1400 samples@amtico.com

# amtico.com

### **Amtico International** Germany

Im Taubental 11 41468 Neuss +49 (0) 2131 359 16 0 info@amtico.de

### **Amtico International** France

36, avenue Hoche 75008 Paris France info@amtico.fr

#### **Amtico International** Scandinavia

Isafjordsgatan 22 164 40 Kista +46 (0) 8 584 233 24 info@amtico.se

#### **Amtico International Asia**

Rm 2003 20/F Office Plus @ Wan Chai 303 Hennessy Rd, Hong Kong +852 2327 7703 samples@amtico.com

### **Amtico International** Middle East, Africa & India

8th Floor Building Number 2 J&G DMCC, Dubai, UAE +971 (0) 50 192 33 46 samples@amtico.com

#### **Amtico International** Australia & New Zealand

PO Box 752 Jimboomba QLD 4280, Australia +61 (0) 477708418 australia.orders@amtico.com

Visit amtico.com for more information on our product range, inspiring ideas, maintenance and installation advice. Every effort is made to achieve accurate reproduction of products in this brochure, however printing limitations can be misleading. Selection of products should be made from actual samples. Samples are small pieces cut from standard tiles. They give only a general indication of the design. Tone and shading can vary slightly from batch to batch and it is not possible to guarantee that the sample will exactly match the material supplied. The policy of the Company is one of continuous development and improvement and the right is reserved to add or delete from the range or change patterns without prior notification. All metric sizes are rounded. All products are manufactured in line with EN649, EN ISO 10582 and EN1307. Brochure correct at the time of printing.

